



## Valves and Accessories by Model Number

### Model 2970.3 Bronze Ball Valve with Stainless Steel Trim

- Smart Connect Feature
- 600 WOG
- Body: Two Piece Bronze Body
- Ball: Full Port 316 Stainless Steel
- Stem: Blowout-Proof 316 Stainless Steel
- Sealing Element: EPDM
- Listings: UPC NSF-61 CSA on 1/2" - 1"
- Conforms to: MSS SP-110
- Parameters: 200 PSI Maximum Working Pressure  
0° - 250°F Operating Temperature



Stock Code	Size
22054	1/2"
22059	3/4"
22064	1"
22069	1-1/4"
22074	1-1/2"
22080	2"

### Model 2970.3ZL\* Zero Lead Bronze Ball Valve with Stainless Steel Trim

- Smart Connect Feature
- 600 WOG
- Body: Two Piece Zero Lead Bronze Body
- Ball: Full Port 316 Stainless Steel
- Stem: Blowout-Proof 316 Stainless Steel
- Sealing Element: EPDM
- Listings: UP Code NSF-61 Annex G CSA on 1/2" - 1"
- Conforms to: MSS SP-110
- Parameters: 200 PSI Maximum Working Pressure  
0° - 250°F Operating Temperature



Stock Code	Size
79820	1/2"
79825	3/4"
79830	1"
79835	1-1/4"
79840	1-1/2"
79845	2"

### Model 2970.10 Bronze Ball Valve with Metal Handle

- Smart Connect Feature
- 600 WOG
- Body: Two Piece Bronze Body
- Ball: Full Port Chrome Plated Brass
- Stem: Blowout-Proof
- Sealing Element: EPDM
- Listings: UPC NSF-61 CSA on 1/2" - 1"
- Conforms to: MSS SP-110
- Parameters: 200 PSI Maximum Working Pressure  
0° - 250°F Operating Temperature



Stock Code	Size
22053	1/2"
22058	3/4"
22063	1"
22068	1-1/4"
22073	1-1/2"
22078	2"

### Model 2970.10 ZL\* Zero Lead Bronze Ball Valve with Metal Handle

- Smart Connect Feature
- 600 WOG
- Body: Two Piece Zero Lead Bronze Body
- Ball: 316 Stainless Steel
- Stem: Blowout-Proof Zero Lead Bronze
- Sealing Element: EPDM
- Listings: UP Code NSF-61 Annex G CSA on 1/2" - 1"
- Conforms to: MSS SP-110
- Parameters: 200 PSI Maximum Working Pressure  
0° - 250°F Operating Temperature



Stock Code	Size
79095	1/2"
79100	3/4"
79105	1"
79110	1-1/4"
79115	1-1/2"
79120	2"



**VIEGA**  
301 N. Main, 9th Floor  
Wichita, KS 67202  
Phone: 800-976-9819  
Fax: 800-976-9817

service@viega.com  
www.viega.com



# TechData

## PRODUCT SPECIFICATION SHEET



### Model 4070 316 Stainless Steel Ball Valve

- Smart Connect Feature
- Body: 316 Stainless Steel
- Ball: 316 Stainless Steel Fullport
- Stem: Blow-out Proof 316 Stainless Steel
- Sealing Element: EPDM
- Listings: NSF-61 Annex G CSA on 1/2" - 1"
- Conforms to: MSS SP-110
- Parameters: 200 PSI Maximum Working Pressure  
0° - 250°F Operating Temperature



Stock Code	Size
81080	1/2"
81085	3/4"
81090	1"
81095	1-1/4"
81100	1-1/2"
81105	2"

### Model 2970 Bronze Ball Valve with POM Handle

- Smart Connect Feature
- 600 WOG
- Body: Two Piece Bronze Body
- Ball: Full Port Chrome Plated Brass
- Stem: Blowout-Proof
- Sealing Element: EPDM
- Listings: UPC NSF-61 CSA on 1/2" - 1"
- Conforms to: MSS SP-110
- Parameters: 200 PSI Maximum Working Pressure  
0° - 250°F Operating Temperature



Stock Code	Size
19678	1/2"
19683	3/4"
19688	1"
19693	1-1/4"
19698	1-1/2"
19703	2"

### Model 2873.81 Semi Lug Butterfly Valve

- Body: Semi-Lug Spheroidal Cast Iron
- Disc: 316 Stainless Steel
- Stem: Blowout-Proof 316 Stainless Steel
- Handle: 10 Position Spring Locking Handle
- Mounting Flange: ISO 5211
- Sealing Element: EPDM
- Conforms to: MSS SP 67 AWWA C504-6
- Parameters: 200 PSI Maximum Working Pressure  
0° - 250°F Operating Temperature



Stock Code	Size
22074	2-1/2"
22075	3"
22076	4"

### Model 0670 Bronze Gas Ball Valve

- Smart Connect Feature
- 600 WOG
- Body: Two Piece Bronze Body
- Ball: Full Port Chrome Plated Brass
- Stem: Blowout-Proof
- Sealing Element: HNBR
- Listings: CSA LC4
- Conforms to: IFGC NFPA 54
- Parameters: 125 PSI Maximum Working Pressure  
-40° - 180°F Operating Temperature



Stock Code	Size
19648	1/2"
19653	3/4"
19658	1"
19663	1-1/4"
19668	1-1/2"
19673	2"



**VIEGA**  
301 N. Main, 9th Floor  
Wichita, KS 67202  
Phone: 800-976-9819  
Fax: 800-976-9817

service@viega.com  
www.viega.com



# TechData

## PRODUCT SPECIFICATION SHEET



### Model 2974 Inline Check Valve

- Smart Connect Feature
- Body: Bronze
- Check Valve Insert: POM Bubble Tight
- Cracking Pressure: .5 PSIG
- Sealing Element: EPDM
- Listings: UPC NSF-61 CSA
- Conforms to: MSS SP-110
- Parameters: 200 PSI Maximum Working Pressure  
0° - 180°F Operating Temperature



Stock Code	Size
22353	1/2"
22358	3/4"
22363	1"
22368	1-1/4"
22373	1-1/2"
22378	2"

### Model 2974ZL\* Zero Lead Inline Check Valve

- Smart Connect Feature
- Body: Zero Lead Bronze
- Check Valve Insert: POM Bubble Tight
- Cracking Pressure: .5 PSIG
- Sealing Element: EPDM
- Listings: UP Code NSF-61 Annex G CSA
- Conforms to: MSS SP-110
- Parameters: 200 PSI Maximum Working Pressure  
0° - 180°F Operating Temperature



Stock Code	Size
79035	1/2"
79040	3/4"
79045	1"
79050	1-1/4"
79055	1-1/2"
79060	2"


### Model 2970.95 Ball Valve Stem Extension Kit (Metal Handle)\*\*



Stock Code	Size
23440	1/2" to 1"
23441	1-1/4" to 2"

\*\*Kit does not include valve

### Model 2970.96 Ball Valve Stem Extension Kit (Lockable Metal Handle)\*\*

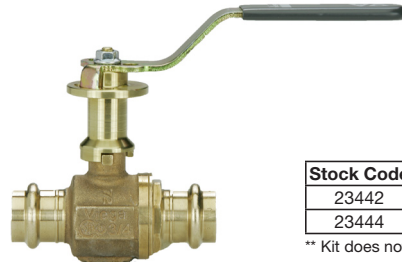

Stock Code	Size
23442	1/2" to 1"
23444	1-1/4" to 2"

\*\* Kit does not include valve

### Model 2970.9 Replacement Handle (Plastic)



Blue Cap	
Stock Code	Size
23413	1/2" & 3/4"
23423	1" & 1-1/4"
23433	1-1/2" & 2"
Red Cap	
Stock Code	Size
23418	1/2" & 3/4"
23428	1" & 1-1/4"
23438	1-1/2" & 2"

### Model 2970.80 Ball Valve Lockable Metal Handle



Stock Code	Size
22143	1/2" to 1"
22163	1-1/4" to 2"

\*"Zero Lead" identifies Viega products meeting the lead free requirements of California and Vermont law, effective January 1, 2010, as tested and listed against NSF- 61, Annex G.



**VIEGA**  
301 N. Main, 9th Floor  
Wichita, KS 67202  
Phone: 800-976-9819  
Fax: 800-976-9817

service@viega.com  
www.viega.com